




# AH4320 Series



## 1. Features:

- Ferrite based SMD Inductor with lower core loss.
- Inductance Range:150nH to 340nH. Custom values are welcomed.
- High current output chokes, upto 48 Amp with max. 20% roll off.
- Low Profile 5.0mm Max. height .
- Foot Print 11.0 x 8.0 mm Max.
- Ideal for Buck Converter, VRM & High Density Board Design.
- Operating frequency up to 2 MHz application.
- Operating Temperature Range -55°C to + 130°C

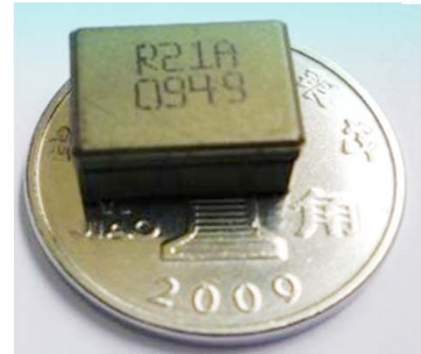


## 2. Electrical Characteristic of AH4320 Series:

Part Number	Inductance <sup>a</sup> (uH)	DCR (mΩ)	Isat <sup>1</sup> (A)	Isat <sup>2</sup> (A)	Isat <sup>3</sup> (A)	I <sub>rms</sub> <sup>4</sup> (A)
	10% or 15%		@25°C	@45°C	@100°C	
AH4320A-R15KHF	0.15 , 10%	0.35	48	47	42	31
AH4320A-R17KHF	0.17 , 10%	0.35	42	41	37	31
AH4320A-R21KHF	0.21 , 10%	0.35	32	31	28	31
AH4320A-R28LHF	0.28 , 15%	0.35	22	21	20	31
AH4320A-R34LHF	0.34 , 15%	0.35	15	14	13	31

## 3. Mechanical Dimension(Unit:mm):

A	B	C	D	E	F	G
Max.	Max.	Max.	Max.	Nom.	Nom.	Nom.
8.0	10.6	5.0	11.0	5.6	2.3	2.5

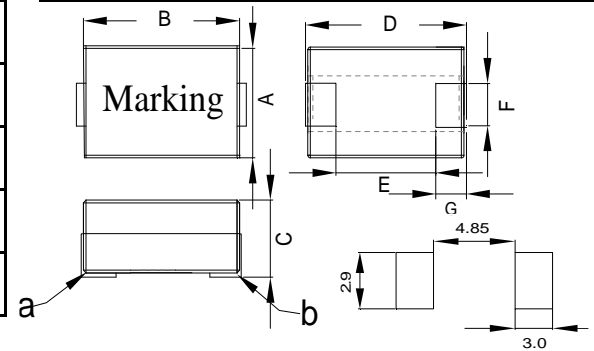


Suggested Pad Layout

## Note:

- 1.Open Circuit Inductance (OCL) test condition:500KHz,0.25Vrms,0Adc ,at 25°C .
- 2.Full Load Inductance (FLL) Test condition:500KHz,0.25Vrms ,Isat;(Ta=25°C).
- 3.Isat<sup>1</sup>,Isat<sup>2</sup> & Isat<sup>3</sup>: DC current that will cause inductance to drop approximately by 20% ;(Ta=25°C).
4. I<sub>rms</sub>: DC current for an approximate temperature rise of 40°C without core loss,.Derating is necessary for AC currents. PCB pad layout, trace thickness and width, air-flow and proximity of other heat generating components will affect the temperature rise. It is recommended the part temperature not exceed 130°C under worst case operating conditions verified in the end application.
- 5.The nominal DCR is measured from point "a" to point "b",as shown above on the mechanical drawing.

## 4. Inductance Characteristics (Inductance vs. Current):

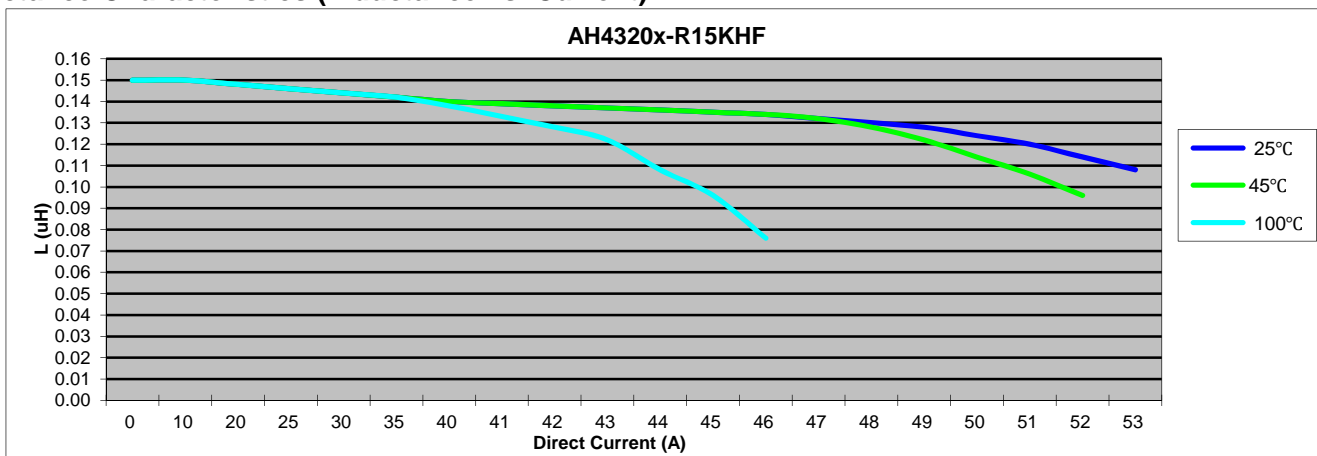



# AH4320 Series

