




SL4018 Series



1. Features:

- Ferrite based SMD Inductor with lower core loss.
- Inductance Range:90nH to 300nH. Custom values are welcomed.
- High current output chokes, upto 72+ Amp with max. 20% roll off.
- Low Profile 5.0mm Max. height .
- Foot Print 10.0 x 7.0 mm Max.
- Ideal for Buck Converter, VRM & High Density Board Design.
- Operating up to 1 MHz application.
- Operating Temperature Range -55°C to + 130°C; RoHS compliant.


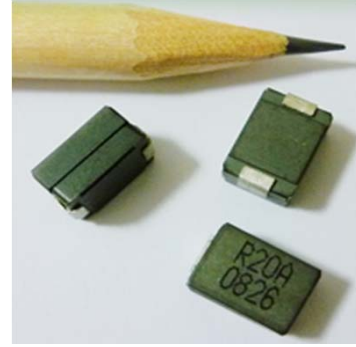


2. Electrical Characteristic of SL4018 Series:

Part Number	Inductance (uH) 10% ,15% or 20%	DCR (mΩ) ±7%	Isat ¹	Isat ²	Isat ³	Irms (A) @25°C
			(A) @25°C	(A) @45°C	(A) @100°C	
SL4018A-R09KHF	0.09 , 10%	0.43	72+	70	67	30.0
SL4018B-R09KHF	0.09 , 10%	0.33	72+	70	67	33.0
SL4018C-R09KHF	0.09 , 10%	0.28	72+	70	67	34.0
SL4018D-R09KHF	0.09 , 10%	0.40	72+	70	67	31.0
SL4018E-R09KHF	0.09 , 10%	0.39	72+	70	67	31.5
SL4018A-R10LHF	0.10 , 15%	0.43	72	65	63	30.0
SL4018B-R10LHF	0.10 , 15%	0.33	72	65	63	33.0
SL4018C-R10LHF	0.10 , 15%	0.28	72	65	63	34.0
SL4018D-R10LHF	0.10 , 15%	0.40	72	65	63	31.0
SL4018E-R10LHF	0.10 , 15%	0.39	72	65	63	31.5
SL4018A-R12LHF	0.12 , 15%	0.43	57	56	49	30.0
SL4018B-R12LHF	0.12 , 15%	0.33	57	56	49	33.0
SL4018C-R12LHF	0.12 , 15%	0.28	57	56	49	34.0
SL4018D-R12LHF	0.12 , 15%	0.40	57	56	49	31.0
SL4018E-R12LHF	0.12 , 15%	0.39	57	56	49	31.5
SL4018A-R13LHF	0.13 , 15%	0.43	56	54	48	30.0
SL4018B-R13LHF	0.13 , 15%	0.33	56	54	48	33.0
SL4018C-R13LHF	0.13 , 15%	0.28	56	54	48	34.0
SL4018D-R13LHF	0.13 , 15%	0.40	56	54	48	31.0
SL4018E-R13LHF	0.13 , 15%	0.39	56	54	48	31.5
SL4018A-R15LHF	0.15 , 15%	0.43	55	52	44	30.0
SL4018B-R15LHF	0.15 , 15%	0.33	55	52	44	33.0
SL4018C-R15LHF	0.15 , 15%	0.28	55	52	44	34.0
SL4018D-R15LHF	0.15 , 15%	0.40	55	52	44	31.0
SL4018E-R15LHF	0.15 , 15%	0.39	55	52	44	31.5
SL4018A-R20LHF	0.20 , 15%	0.43	36	33	27	30.0
SL4018B-R20LHF	0.20 , 15%	0.33	36	33	27	33.0
SL4018C-R20LHF	0.20 , 15%	0.28	36	33	27	34.0
SL4018D-R20LHF	0.20 , 15%	0.40	36	33	27	31.0
SL4018E-R20LHF	0.20 , 15%	0.39	36	33	27	31.5
SL4018A-R30MHF	0.30 , 20%	0.43	22	20	16	30.0
SL4018B-R30MHF	0.30 , 20%	0.33	22	20	16	33.0
SL4018C-R30MHF	0.30 , 20%	0.28	22	20	16	34.0
SL4018D-R30MHF	0.30 , 20%	0.40	22	20	16	31.0
SL4018E-R30MHF	0.30 , 20%	0.39	22	20	16	31.5

3. Mechanical Dimension(Unit:mm):

A	B	C	D	E	F	G
Max.	Max.	Max.	Max.	Nom.	Nom.	Nom.
7.0	9.5	5.0	10.0	6.1	2.7	1.6

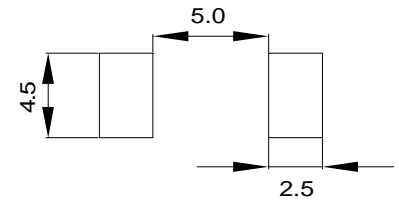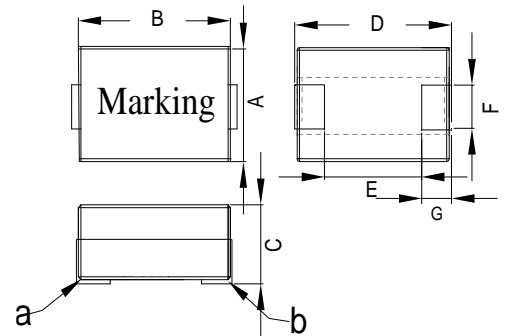

Suggested Pad Layout

Note:

- 1.Open Circuit Inductance (OCL) test condition: 100KHz,0.10Vrms ,0Adc,at 25°C.
- 2.Full Load Inductance (FLL) Test condition: 100KHz,0.10Vrms ,Isat;(Ta=25°C).
- 3.Isat¹,Isat²,Isat³ : DC current that will cause inductance to drop approximately by 20%;(Ta=25°C).
4. Irms: DC current for an approximate temperature rise(ΔT) of 40°C without core loss.,Derating is necessary for AC currents. PCB pad layout, trace thickness and width, air-flow and proximity of other heat generating components will affect the temperature rise. It is recommended the part temperature not exceed 130°C under worst case operating conditions verified in the end application.
- 5.The nominal DCR is measured from point "a" to point"b",as shown above on the mechanical drawing.




SL4018 Series



4. Inductance characteristics:

Inductance vs. Current

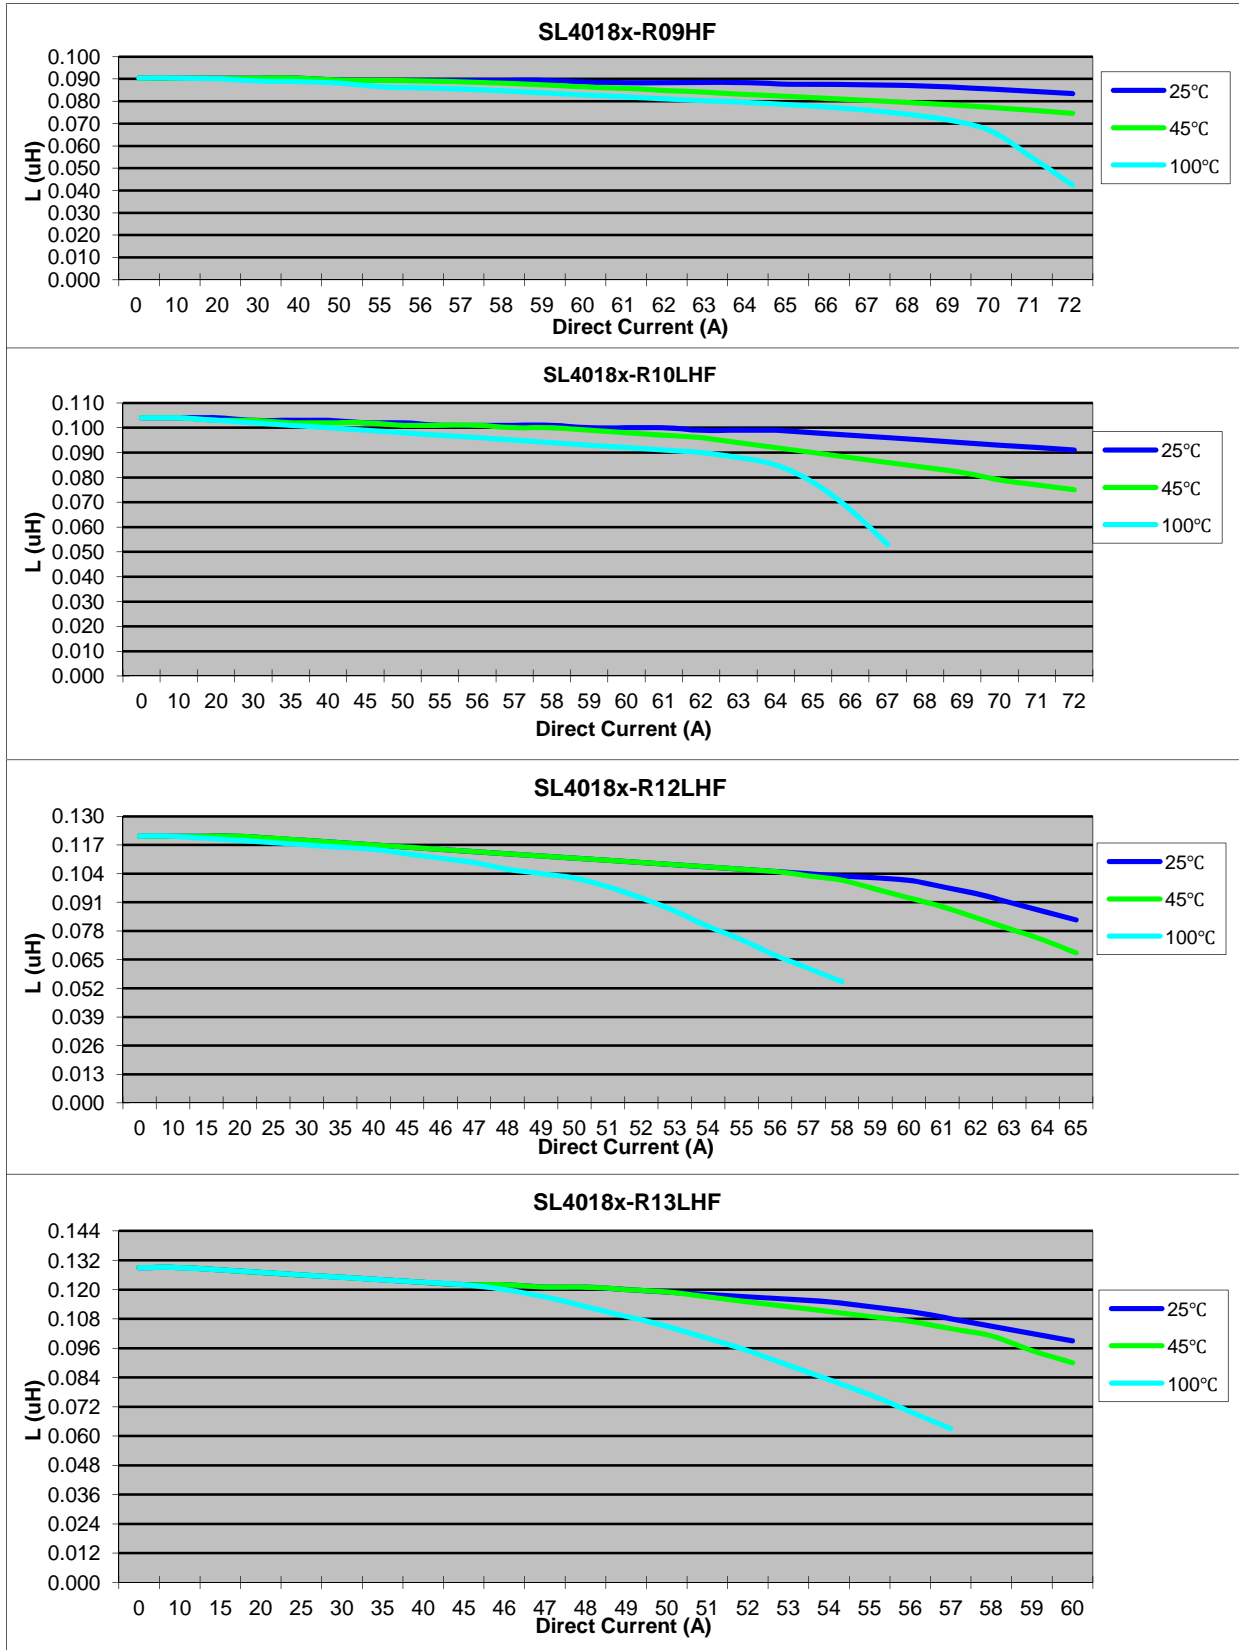



SL4018 Series

Inductance vs. Current

